

FORM PTO-1390 (REV. 11-2000)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371			1422-0483P
			U.S. APPLICATION NO. (If known, see 37 CFR 1.5) 09/889955
INTERNATIONAL APPLICATION NO.	INTERNATIONAL FILING DATE	PRIORITY DATE CLAIMED	
PCT/JP00/00271	January 21, 2000	January 25, 1999	
TITLE OF INVENTION HIGHLY WATER-ABSORBING RESIN PARTICLE			
APPLICANT(S) FOR DO/EO/US NAGATA, Manabu; TAKEMORI, Shinichi; UYEYAMA, Hiroyuki; OHNISHI, Kazuaki; YABE, Youko and ISHIKAWA, Norihiko			
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:			
<ol style="list-style-type: none"> 1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39 (1). 4. <input type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31). 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) <ol style="list-style-type: none"> a. <input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau. WO 00/43441 c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input checked="" type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)). <ol style="list-style-type: none"> a. <input checked="" type="checkbox"/> is transmitted herewith. b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4) 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)). <ol style="list-style-type: none"> a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input checked="" type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). 10. <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). 			
Items 11. to 20. below concern document(s) or information included:			
<ol style="list-style-type: none"> 11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.-1449 and International Search Report (PCT/ISA/210) w/ 6 cited documents. 12. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 13. <input checked="" type="checkbox"/> A FIRST preliminary amendment. 14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 15. <input type="checkbox"/> A substitute specification. 16. <input type="checkbox"/> A change of power of attorney and/or address letter. 17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821-1.825. 18. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4). 19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4). 20. <input checked="" type="checkbox"/> Other items or information: PCT/IPEA/409 Zero (0) sheets of formal drawings 			

U.S. APPLICATION NO (if known, see 37 CFR 1.51) 09/889955		INTERNATIONAL APPLICATION NO PCT/JP00/00271		ATTORNEY'S DOCKET NUMBER 1422-0483P	
---	--	--	--	--	--

<p>21. <input checked="" type="checkbox"/> The following fees are submitted:</p> <p>BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO. \$1,000.00</p> <p>International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$860.00</p> <p>International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO. \$710.00</p> <p>International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$690.00</p> <p>International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4). \$100.00</p> <p>ENTER APPROPRIATE BASIC FEE AMOUNT =</p> <p>Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).</p> <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="width:15%;">CLAIMS</th> <th style="width:20%;">NUMBER FILED</th> <th style="width:20%;">NUMBER EXTRA</th> <th style="width:20%;">RATE</th> <th style="width:25%;"></th> </tr> <tr> <td>Total Claims</td> <td>7 - 20 =</td> <td>0</td> <td>X \$18.00</td> <td>\$ 0.00</td> </tr> <tr> <td>Independent Claims</td> <td>1 - 3 =</td> <td>0</td> <td>X \$80.00</td> <td>\$ 0.00</td> </tr> <tr> <td colspan="3">MULTIPLE DEPENDENT CLAIM(S) (if applicable)</td> <td>None</td> <td>+ \$270.00</td> </tr> <tr> <td colspan="4">TOTAL OF ABOVE CALCULATIONS =</td> <td>\$ 860.00</td> </tr> </table> <p><input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.</p> <p style="text-align: right;">SUBTOTAL = \$ 860.00</p> <p>Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).</p> <p style="text-align: right;">TOTAL NATIONAL FEE = \$ 860.00</p> <p>Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +</p> <p style="text-align: right;">TOTAL FEES ENCLOSED = \$ 900.00</p> <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:60%;"></td> <td style="width:20%; text-align: center;">Amount to be: refunded</td> <td style="width:20%; text-align: center;">\$</td> </tr> <tr> <td></td> <td style="text-align: center;">charged</td> <td style="text-align: center;">\$</td> </tr> </table>	CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		Total Claims	7 - 20 =	0	X \$18.00	\$ 0.00	Independent Claims	1 - 3 =	0	X \$80.00	\$ 0.00	MULTIPLE DEPENDENT CLAIM(S) (if applicable)			None	+ \$270.00	TOTAL OF ABOVE CALCULATIONS =				\$ 860.00		Amount to be: refunded	\$		charged	\$	<p>CALCULATIONS</p> <p>PTO USE ONLY</p>
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE																													
Total Claims	7 - 20 =	0	X \$18.00	\$ 0.00																												
Independent Claims	1 - 3 =	0	X \$80.00	\$ 0.00																												
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			None	+ \$270.00																												
TOTAL OF ABOVE CALCULATIONS =				\$ 860.00																												
	Amount to be: refunded	\$																														
	charged	\$																														

- a. ☒ A check in the amount of \$ **900.00** to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account. No. _____ in the amount of \$ _____ to cover the above fees.
 A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any
 overpayment to Deposit Account No. 02-2448.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

Send all correspondence to:

Birch, Stewart, Kolasch & Birch, LLP or Customer No. 2292

P.O. Box 747

Falls Church, VA 22040-0747

(703)205-8000

Date: July 25, 2001

By

Joseph A. Kolasch
 Joseph A. Kolasch, #22,463

/Rem

PATENT
1422-0483P

IN THE U.S. PATENT AND TRADEMARK OFFICE

Applicant: NAGATA, Manabu et al. Conf.:
Int'l. Appl. No.: PCT/JP00/00271
Appl. No.: New Group:
Filed: July 25, 2001 Examiner:
For: HIGHLY WATER-ABSORBING RESIN
PARTICLE

PRELIMINARY AMENDMENT

BOX PATENT APPLICATION

Assistant Commissioner for Patents
Washington, DC 20231

July 25, 2001

Sir:

The following Preliminary Amendments and Remarks are respectfully submitted in connection with the above-identified application.

AMENDMENTS

IN THE SPECIFICATION:

Please amend the specification as follows:

Before line 1, insert --This application is the national phase under 35 U.S.C. § 371 of PCT International Application No. PCT/JP00/00271 which has an International filing date of January 21, 2000, which designated the United States of America and was not published in English.--

IN THE CLAIMS:

Please amend the claims as follows:

3. (Amended) The high water-absorbent resin particle according to claim 1, wherein the content of ethylene in the ethylene-glycidyl (meth)acrylate copolymer is 50 to 99% by weight.

4. (Amended) The high water-absorbent resin particle according to claim 1, wherein the melting point of the ethylene-glycidyl (meth)acrylate copolymer is 50° to 150°C.

5. (Amended) The high water-absorbent resin particle according to claim 1, wherein the melt flow rate of the ethylene-glycidyl (meth)acrylate copolymer is 1 to 400 g/10 minutes at 190°C under 2160 gf.

6. (Amended) The high water-absorbent resin particle according to claim 1, wherein the high water-absorbent resin is at least one member selected from the group consisting of a crosslinked acrylate polymer, a crosslinked vinyl alcohol-acrylate copolymer, a crosslinked maleic anhydride-grafted polyvinyl alcohol, crosslinked acrylate-methacrylate copolymer, a crosslinked saponified methyl acrylate-vinyl acetate copolymer, a crosslinked starch-acrylate graft copolymer, a crosslinked saponified starch-acrylonitrile graft copolymer, a crosslinked carboxymethyl cellulose, a crosslinked isobutylene-maleic anhydride copolymer, and a crosslinked ethylene oxide polymer.

7. (Amended) The high water-absorbent resin particle according to claim 1, wherein the resin particle has an average particle diameter of 5 to 1000 μm .

REMARKS

The specification has been amended to provide a cross-reference to the previously filed International Application. The claims have also been amended to delete multiple dependencies. Entry of the above amendments is earnestly solicited. An early and favorable first action on the merits is earnestly solicited.

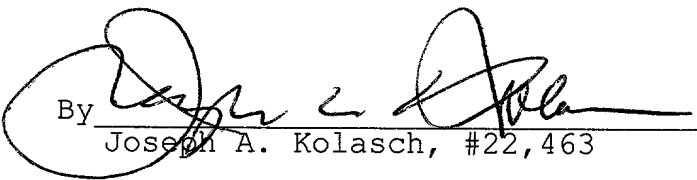
Attached hereto is a marked-up version of the changes made to the application by this Preliminary Amendment.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. § 1.16 or under 37 C.F.R. § 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By


Joseph A. Kolasch, #22,463

P.O. Box 747
Falls Church, VA 22040-0747
(703) 205-8000

JAK/rem
1422-0483P

(Rev. 02/12/01)

VERSION WITH MARKINGS TO SHOW CHANGES MADE

The specification has been amended to provide cross-referencing to the International Application.

IN THE CLAIMS:

The claims have been amended as follows:

3. (Amended) The high water-absorbent resin particle according to claim 1 [or 2], wherein the content of ethylene in the ethylene-glycidyl (meth)acrylate copolymer is 50 to 99% by weight.

4. (Amended) The high water-absorbent resin particle according to claim 1 [any one of claim 1 to 3], wherein the melting point of the ethylene-glycidyl (meth)acrylate copolymer is 50° to 150°C.

5. (Amended) The high water-absorbent resin particle according to claim 1 [any one of claims 1 to 4], wherein the melt flow rate of the ethylene-glycidyl (meth)acrylate copolymer is 1 to 400 g/10 minutes at 190°C under 2160 gf.

6. (Amended) The high water-absorbent resin particle according to claim 1 [any one of claims 1 to 5], wherein the high water-absorbent resin is at least one member selected from the group consisting of a crosslinked acrylate polymer, a crosslinked vinyl alcohol-acrylate copolymer, a crosslinked maleic anhydride-grafted polyvinyl alcohol, crosslinked acrylate-methacrylate copolymer, a crosslinked saponified methyl acrylate-vinyl acetate copolymer, a crosslinked starch-acrylate graft copolymer, a crosslinked saponified starch-acrylonitrile graft copolymer, a crosslinked carboxymethyl cellulose, a crosslinked isobutylene-maleic anhydride copolymer, and a crosslinked ethylene oxide polymer.

7. (Amended) The high water-absorbent resin particle according to claim 1 [any one of claims 1 to 6], wherein the resin particle has an average particle diameter of 5 to 1000 μm .

DESCRIPTIONHIGHLY WATER-ABSORBING RESIN PARTICLETECHNICAL FIELD

5 The present invention relates to a high water-absorbent resin particle. More specifically, the present invention relates to a high water-absorbent resin particle which can be favorably used as hygienic materials such as paper diapers and sanitary napkins, agricultural and horticultural materials, and the like.

BACKGROUND ART

10 The high water-absorbent resin is a functional resin capable of absorbing and retaining water in an amount of several dozens to 1000 times or so of its weight. Because of the characteristics, it has been widely utilized in hygienic materials such as paper diapers and sanitary napkins, agricultural and
15 horticultural materials, and the like.

 Conventionally, the high water-absorbent resin has been usually used in the form of powder having very low adhesive strength. Therefore, the high water-absorbent resin has been used in the form of a water-absorbent material by forming a composite together with a fibrous substrate such as a nonwoven fabric,
20 natural fibers such as pulp, or synthetic fibers when the high water-absorbent resin is applied to the above-mentioned uses. The water-absorbent material is designed to prevent migration and localization of the high water-absorbent resin in the water-absorbent material, and drop-off of the resin from the fibers by the intertwining of the high water-absorbent resin and the fibers.

25 However, in the recent years, although reductions in weight and thickness

of the water-absorbent material are required in the field of hygienic materials, the conventional water-absorbent materials described above do not meet these requirements.

Therefore, in order to achieve reductions in weight and thickness of high water-absorbent materials, reduction of the amount of the fibrous substrate has been studied. However, when the amount of the fibrous substrate is reduced, it would be difficult to prevent migration and localization of the high water-absorbent resin in the water-absorbent material, and drop-off of the resin from the fibers only by the intertwining with the fibrous substrate.

As a means for solving these problems, there has been proposed a high water-absorbent resin composition prepared by forming a composite by fusing or fixing a thermoplastic resin on the surface of a high water-absorbent resin (Japanese Patent Laid-Open No. Hei 5-320523).

However, when the above-mentioned high water-absorbent resin composition is thermally fused to the fibrous substrate under practical heat-treatment conditions of 100° to 150°C or so, the adhesion of the high water-absorbent composition to the fibrous substrate after water absorption may be insufficient in some cases.

An object of the present invention is to provide a high water-absorbent resin particle excellent in adhesiveness to the fibrous substrate, which hardly drops off from a fibrous substrate even after the thermal fusion to the fibrous substrate such as a nonwoven fabric, pulp, synthetic fibers or paper, and the subsequent water absorption.

DISCLOSURE OF INVENTION

According to the present invention, there is provided a high water-absorbent resin particle, prepared by adhering an ethylene-glycidyl (meth)acrylate copolymer to the surface of a resin particle made of a high water-absorbent resin in the ratio of 0.5 to 50 parts by weight of the ethylene-glycidyl (meth)acrylate copolymer based on 100 parts by weight of the resin particle.

BEST MODE FOR CARRYING OUT THE INVENTION

The high water-absorbent resin particle of the present invention is prepared by adhering the above-mentioned ethylene-glycidyl (meth)acrylate copolymer to the surface of a resin particle made of a high water-absorbent resin.

Incidentally, the above-mentioned term “(meth)acrylate” means “acrylate” or “methacrylate.”

The above-mentioned high water-absorbent resin is a crosslinked hydrophilic polymer having a water-absorbing capacity from several dozens to 1000 times or so of its weight, and has a hydrophilic group such as a carboxylic acid group, a carboxylate group, a carboxylic acid anhydride group, hydroxyl group or ethylene oxide group as a structural unit. The kind of the high water-absorbent resin is not limited to specified ones, and almost all of those for uses, including hygienic materials such as paper diapers and sanitary napkins, agricultural and horticultural materials, and the like can be usually used.

Concrete examples of the above-mentioned high water-absorbent resin include at least one member selected from the group consisting of a crosslinked acrylate polymer, a crosslinked vinyl alcohol-acrylate copolymer, a crosslinked maleic anhydride-grafted polyvinyl alcohol, a crosslinked acrylate-methacrylate copolymer, a crosslinked saponified methyl acrylate-vinyl acetate copolymer, a

crosslinked starch-acrylate graft copolymer, a crosslinked saponified starch-acrylonitrile graft copolymer, a crosslinked carboxymethyl cellulose, a crosslinked isobutylene-maleic anhydride copolymer, and a crosslinked ethylene oxide polymer. These high water-absorbent resins can be used alone or in admixture of two or more kinds. Among them, the crosslinked acrylate polymer can be favorably used.

It is desired that the average particle diameter of the resin particle made of the above-mentioned high water-absorbent resin is not less than 5 μm , preferably not less than 20 μm , more preferably not less than 100 μm , from the viewpoint of easy handling. Also, it is desired that the average particle diameter of the resin particle made of the above-mentioned high water-absorbent resin is not more than 1000 μm , preferably not more than 800 μm , more preferably not more than 600 μm , from the viewpoints of homogeneously dispersing the high water-absorbent resin particle of the present invention over the fibrous substrate, thereby giving uniform water-absorbency.

One of the major characteristics in the present invention resides in that the ethylene-glycidyl (meth)acrylate copolymer is adhered to the surface of a resin particle made of a high water-absorbent resin.

As described above, in the case where the ethylene-glycidyl (meth)acrylate copolymer is adhered to the surface of the resin particle made of a high water-absorbent resin, there is exhibited an excellent effect such that the adhesion of the resulting high water-absorbent resin particle to the fibrous substrate becomes very firm. The reason why this excellent effect is exhibited has not yet been clear, but it is thought to be based upon the fact that when microscopically observed, glycidyl group of the ethylene-glycidyl (meth)acrylate

copolymer and a hydrophilic group of the high water-absorbent resin are firmly bonded by covalent bond, hydrogen bond, van der Waals force, or the like, while ethylene group of the ethylene-glycidyl (meth)acrylate copolymer is firmly adhered to the fibrous substrate.

5 It is desired that the ethylene content in the ethylene-glycidyl (meth)acrylate copolymer is not less than 50% by weight, preferably not less than 60% by weight, more preferably not less than 70% by weight, from the viewpoint of the improvement of adhesiveness to the fibrous substrate. Also, it is desired that the ethylene content in the ethylene-glycidyl (meth)acrylate
10 copolymer is not more than 99% by weight, preferably not more than 97% by weight, more preferably not more than 95% by weight, from the viewpoint of strengthening the bond between the fibrous substrate and the resin particle made of a high water-absorbent resin.

15 The kind of the ethylene-glycidyl (meth)acrylate copolymer is not limited to specified ones.

Concrete examples of the ethylene-glycidyl (meth)acrylate copolymer include, for instance, an ethylene-glycidyl acrylate copolymer, an ethylene-glycidyl methacrylate copolymer, an ethylene-glycidyl acrylate-glycidyl methacrylate copolymer, an ethylene-glycidyl acrylate-vinyl acetate copolymer,
20 an ethylene-glycidyl acrylate-methyl acrylate copolymer, an ethylene-glycidyl acrylate-vinyl acetate-methyl acrylate copolymer, an ethylene-glycidyl acrylate-methyl methacrylate copolymer, an ethylene-glycidyl acrylate-vinyl acetate-methyl methacrylate copolymer, an ethylene-glycidyl acrylate-ethyl acrylate copolymer, an ethylene-glycidyl acrylate-vinyl acetate-ethyl acrylate copolymer,
25 an ethylene-glycidyl methacrylate-vinyl acetate copolymer, an ethylene-glycidyl

methacrylate-methyl acrylate copolymer, an ethylene-glycidyl methacrylate-vinyl acetate-methyl acrylate copolymer, an ethylene-glycidyl methacrylate-methyl methacrylate copolymer, an ethylene-glycidyl methacrylate-vinyl acetate-methyl methacrylate copolymer, an ethylene-glycidyl methacrylate-ethyl acrylate copolymer, an ethylene-glycidyl methacrylate-vinyl acetate-ethyl acrylate copolymer, an ethylene-glycidyl acrylate-glycidyl methacrylate-vinyl acetate copolymer, an ethylene-glycidyl acrylate-glycidyl methacrylate-methyl acrylate copolymer, and the like. These copolymers can be used alone or in admixture of two or more kinds. Among them, there can be favorably used at least one member selected from the group consisting of the ethylene-glycidyl acrylate copolymer, the ethylene-glycidyl methacrylate copolymer, the ethylene-glycidyl acrylate-vinyl acetate copolymer, the ethylene-glycidyl methacrylate-vinyl acetate copolymer, the ethylene-glycidyl acrylate-methyl acrylate copolymer and the ethylene-glycidyl methacrylate-methyl acrylate copolymer.

It is desired that the melting point of the ethylene-glycidyl (meth)acrylate copolymer is not lower than 50°C, preferably not lower than 60°C, as determined by a differential thermal analyzer, from the viewpoint of preventing the generation of blocking during storage or use of the high water-absorbent resin particle. Also, it is desired that the melting point of the ethylene-glycidyl (meth)acrylate copolymer is not higher than 150°C, preferably not higher than 130°C, more preferably not higher than 120°C, from the viewpoint of enabling the mixing of the high water-absorbent resin particle with the fibrous substrate at relatively low temperatures.

In addition, it is desired that the melt flow rate of the ethylene-glycidyl (meth)acrylate copolymer is not less than 1 g/10 minutes, preferably not less than

2 g/10 minutes at 190°C under 2160 gf, from the viewpoint of enabling the homogeneous mixing when the copolymer is mixed with the resin particle made of a high water-absorbent resin with heating, and is not more than 400 g/10 minutes, preferably not more than 300 g/10 minutes, more preferably not more than 100 g/10 minutes at 190°C under 2160 gf, from the viewpoint of the avoidance of the lowering of water-absorbency of the high water-absorbent resin particle due to the coat of the ethylene-glycidyl (meth)acrylate copolymer on the surface of the above-mentioned resin particle.

Incidentally, the ethylene-glycidyl (meth)acrylate copolymer can be used together with other thermoplastic resins within a range which would not hinder the object of the present invention.

The shape of the ethylene-glycidyl (meth)acrylate copolymer is not limited to specified ones. As the shape, there can be cited fine powder, powder, grain, granule, paste, pellet, lumpy mass, and the like.

It is desired that the amount of the ethylene-glycidyl (meth)acrylate copolymer is not less than 0.5 parts by weight, preferably not less than 3 parts by weight based on 100 parts by weight of the resin particle made of a high water-absorbent resin, from the viewpoint of giving the resulting high water-absorbent resin particle sufficient adhesiveness to the fibrous substrate, and is not more than 50 parts by weight, preferably not more than 30 parts by weight, based on 100 parts by weight of the resin particle made of a high water-absorbent resin, from the viewpoint of the avoidance of the lowering of water-absorbency of the high water-absorbent resin particle due to the coat of the ethylene-glycidyl (meth)acrylate copolymer on the surface of the above-mentioned resin particle.

As a process for preparing the high water-absorbent resin particle of the

present invention, there can be cited, for instance, (A) a process comprising simply mixing a resin particle made of a high water-absorbent resin with an ethylene-glycidyl (meth)acrylate copolymer, thereby adhering the copolymer to the surface of the high water-absorbent resin; (B) a process comprising mixing a resin particle made of a high water-absorbent resin with an ethylene-glycidyl (meth)acrylate copolymer, heating the resulting mixture after mixing or at the same time of mixing at a temperature of not lower than the melting point of the ethylene-glycidyl (meth)acrylate copolymer, to melt the ethylene-glycidyl (meth)acrylate copolymer, and fusing the molten copolymer to the surface of the resin particle made of a high water-absorbent resin; (C) a process comprising dissolving an ethylene-glycidyl (meth)acrylate copolymer in a suitable solvent, mixing the solution with a resin particle made of a high water-absorbent resin, stirring the resulting mixture, and thereafter distilling away the solvent with heating, thereby adhering the ethylene-glycidyl (meth)acrylate copolymer onto the surface of the resin particle; and the like.

The device for mixing a resin particle made of a high water-absorbent resin with the ethylene-glycidyl (meth)acrylate copolymer with heating is not limited to specified ones, as long as it is a heatable mixer. Its concrete examples include, for instance, a kneader, an extruder, Nauta Mixer, Henschel Mixer, Banbury Mixer and the like.

The high water-absorbent resin particle of the present invention thus obtained can be applied to various fibrous substrates.

The fibrous substrates include, for instance, woven fabrics, nonwoven fabrics, natural fibers such as pulps, synthetic fibers, paper, foamed resin sheets such as soft polyurethane foams, but the present invention is not limited only to

those exemplified ones.

The method for applying the high water-absorbent resin particle of the present invention to a fibrous substrate includes, for instance, a method comprising dispersing a high water-absorbent resin particle in a fibrous substrate such as a nonwoven fabric cloth, pulp or paper; a method comprising interposing a layer of a high water-absorbent resin particle between a plurality of fibrous substrates, and subjecting the resulting laminate to heat treatment at a temperature of 50° to 170°C or so; and the like. According to these methods, the ethylene-glycidyl (meth)acrylate copolymer adhered to the surface of high water-absorbent resin particle is melted by heating, so that the high water-absorbent resin particle can be tightly bonded to the fibrous substrate. Therefore, the fibrous substrate, to which the high water-absorbent resin particle is adhered, exhibits an excellent effect such that the drop-off of the water-absorbent gel formed by the water absorption of the high water-absorbent resin particle from the fibrous substrate can be avoided.

Next, the present invention will be specifically described on the basis of the following examples, without intending to limit the present invention only to these examples.

Example 1

A bench-type kneader (manufactured by Irie Shokai, Type: PBV-03) heated to 150°C was charged with 100 parts by weight of resin particles made of a high water-absorbent resin (manufactured by Sumitomo Seika Chemicals Co., Ltd. under the trade name of AQUA KEEP UG-310P, crosslinked acrylate

polymer, average particle diameter: 400 μ m). Next, 10 parts by weight of an ethylene-glycidyl acrylate-vinyl acetate copolymer (manufactured by Sumitomo Chemical Co., Ltd. under the trade name of BOND FAST 7B, melting point: 95°C, melt flow rate: 7 g/10 minutes, ethylene content: 83% by weight, glycidyl methacrylate content: 12% by weight, vinyl acetate content: 5% by weight) was added to the above bench-type kneader with stirring, and the mixture was blended with stirring for 10 minutes. Thereafter, the resulting mixture was cooled to room temperature with stirring, to give high water-absorbent resin particles.

Example 2

The same procedures as in Example 1 were carried out except that the amount of the ethylene-glycidyl acrylate-vinyl acetate copolymer used in Example 1 was changed to 20 parts by weight, to give high water-absorbent resin particles.

Example 3

The same procedures as in Example 1 were carried out except that the amount of the ethylene-glycidyl acrylate-vinyl acetate copolymer used in Example 1 was changed to 30 parts by weight, to give high water-absorbent resin particles.

Example 4

The same procedures as in Example 2 were carried out except that 20 parts by weight of an ethylene-glycidyl methacrylate copolymer

(manufactured by Sumitomo Chemical Co., Ltd. under the trade name of BOND FAST E, melting point: 103°C, melt flow rate: 3 g/10 minutes, ethylene content: 88% by weight, glycidyl methacrylate content: 12% by weight) was used in place of 20 parts by weight of the ethylene-glycidyl acrylate-vinyl acetate copolymer used in Example 2, to give high water-absorbent resin particles.

Comparative Example 1

The same procedures as in Example 2 were carried out except that 20 parts by weight of a low-density polyethylene (manufactured by Sumitomo Seika Chemicals Co., Ltd. under the trade name of FLOTHENE A1003N, melting point 110°C, melt flow rate: 75 g/10 minutes) was used in place of 20 parts by weight of the ethylene-glycidyl acrylate-vinyl acetate copolymer used in Example 2, to give high water-absorbent resin particles.

Comparative Example 2

The same procedures as in Example 2 were carried out except that 20 parts by weight of an ethylene-acrylic acid copolymer (manufactured by Dow Chemical Japan Limited under the trade name of PRIMACOR 5980, melting point 80°C, melt flow rate: 300 g/10 minutes, ethylene content: 80% by weight, acrylic acid content: 20% by weight) was used in place of 20 parts by weight of the ethylene-glycidyl acrylate-vinyl acetate copolymer used in Example 2, to give high water-absorbent resin particles.

Comparative Example 3

The same procedures as in Example 1 were carried out except that the

ethylene-glycidyl acrylate-vinyl acetate copolymer used in Example 1 was not used, to give high water-absorbent resin particles.

Comparative Example 4

5 The same procedures as in Example 1 were carried out except that the amount of the ethylene-glycidyl acrylate-vinyl acetate copolymer used in Example 1 was changed to 60 parts by weight, to give high water-absorbent resin particles.

10 Next, as the physical properties of the high water-absorbent resin particles obtained in Examples 1 to 4 and Comparative Examples 1 to 4, adhesiveness, water-absorption rate, and amount of water absorbed were determined in accordance with the following methods. The results are shown in Table 1.

15 (1) Adhesiveness

A. Adhesiveness (Drop-off Ratio) Before Water Absorption

 On a dry-type nonwoven fabric made of polyolefin fibers (10 cm × 10 cm × 0.2 cm) were uniformly dispersed 0.5 g of the high water-absorbent resin particles, and subjected to a heat treatment in a hot air
20 drier at 130°C for 7 minutes, to give a nonwoven fabric sample. Thereafter, this nonwoven fabric sample was cooled to room temperature. High water-absorbent resin particles which were not fused to the sample were shaken off from the sample. The high water-absorbent resin shaken off was weighed.

 The adhesiveness (drop-off ratio) before water absorption was obtained
25 from the equation:

[Drop-off Ratio (%) Before Water Absorption]

= [Weight (g) of High Water-Absorbent Resin Shaken Off]

÷ [Amount of High Water-Absorbent Resin Particles Used (0.5 g)] × 100.

5 B. Adhesiveness (Drop-off Ratio) After Water Absorption

A 500-ml beaker was charged with 300 ml of 0.9% saline. The nonwoven fabric sample obtained after the determination of the adhesiveness (drop-off ratio) in the above section “A. Adhesiveness (Drop-off Ratio) Before Water Absorption” was cut into a piece of 5 cm × 5 cm. The nonwoven fabric sample
10 piece was dipped in the saline, with the face of the dispersed high water-absorbent resin particles being faced down.

After the dipping for 10 minutes, the nonwoven fabric sample piece was further dipped for 2 minutes with stirring at 600 rpm using a stirrer.

Next, the nonwoven fabric sample was taken out from saline, and excess
15 water was removed by suction filtration. Thereafter, the weight of the nonwoven fabric sample after water absorption (Weight A) was determined. Further, excess saline was removed from the gel remaining in the beaker by suction filtration, and thereafter the weight of the residual gel (Weight B of Gel) was determined.

20 Only a nonwoven fabric not having fused high water-absorbent resin particles was dipped in 0.9% saline, and excess saline was removed by suction filtration in the same manner as the above. Thereafter, the nonwoven fabric (Weight C) was weighed.

The adhesiveness (drop-off ratio) after water absorption was obtained
25 from the equation:

[Drop-off Ratio (%) After Water Absorption]

= [Weight B of Gel]

\div [Weight A + Weight B of Gel – Weight C] \times 100.

5 (2) Water-Absorption Rate

A 100-ml beaker was charged with 50 ml of 0.9% saline, and 2 g of the high water-absorbent resin particles were added thereto with stirring at 600 rpm using a stirrer. The time point of addition was defined as a starting point, and the time point at which the swirling due to stirring disappeared was defined as a termination point. The water-absorption rate was defined as a time period required from the starting point to the finishing point.

(3) Amount of Water Absorbed

Two grams of the high water-absorbent resin particles were added to 500 ml of 0.9% saline and immersed therein for 1 hour with stirring using a stirrer. Thereafter, the liquid mixture was transferred to a 200-mesh sieve to drain water for 30 minutes. The weight of the high water-absorbent resin particles after water absorption was determined.

The amount of water absorbed was obtained from the equation:

[Amount of Water Absorbed]

= [Weight (g) After Water Absorption]

\div [Amount of Original High Water-Absorbent Resin Particles Used (2 g)] \times 100.

Table 1

Properties of High Water-Absorbent Resin Particles				
Ex. Nos.	Drop-off Ratio (%)		Water-Absorption Rate (seconds)	Amount of Water Absorbed (g/g)
	Before Water Absorption	After Water Absorption		
1	0	51	5	52
2	0	23	22	34
3	0	6	45	26
4	0	24	24	28
<u>Comp. Ex. Nos.</u>				
1	15	78	24	26
2	13	74	43	23
3	100	0	4	60
4	0	0	>3600	5

It can be seen from the results shown in Table 1 that the high water-absorbent resin particles obtained in Examples 1 to 4 are hardly dropped off from a fibrous substrate even after subjected to thermal fusion onto the fibrous substrate such as a nonwoven fabric and water absorption. Therefore, the resin particles are excellent in adhesiveness to the fibrous substrate.

INDUSTRIAL APPLICABILITY

The high water-absorbent resin particle of the present invention exhibits excellent effects that the high water-absorbent resin particle is stably maintained even after water absorption, since the high water-absorbent resin particle is

firmly adhered onto a fibrous substrate only by heat-fusion. Therefore, the high water-absorbent resin particle of the present invention exhibits effects of the prevention of migration and localization of the high water-absorbent resin particle in the water-absorbent material or drop-off of the high water-absorbent resin particle from fibers in the case where the amount of the fibrous substrate is reduced.

Accordingly, the high water-absorbent resin particle of the present invention can be suitably used in various applications, including hygienic materials, such as paper diapers and sanitary napkins, and water-absorbent materials for other industrial materials such as agricultural and horticultural materials.

CLAIMS

1. A high water-absorbent resin particle, prepared by adhering an ethylene-glycidyl (meth)acrylate copolymer to the surface of a resin particle made of a high water-absorbent resin in the ratio of 0.5 to 50 parts by weight of the ethylene-glycidyl (meth)acrylate copolymer based on 100 parts by weight of the resin particle.

2. The high water-absorbent resin particle according to claim 1, wherein the ethylene-glycidyl (meth)acrylate copolymer is at least one member selected from the group consisting of an ethylene-glycidyl acrylate copolymer, an ethylene-glycidyl methacrylate copolymer, an ethylene-glycidyl acrylate-vinyl acetate copolymer, an ethylene-glycidyl methacrylate-vinyl acetate copolymer, an ethylene-glycidyl acrylate-methyl acrylate copolymer, and an ethylene-glycidyl methacrylate-methyl acrylate copolymer.

3. The high water-absorbent resin particle according to claim 1 or 2, wherein the content of ethylene in the ethylene-glycidyl (meth)acrylate copolymer is 50 to 99% by weight.

4. The high water-absorbent resin particle according to any one of claims 1 to 3, wherein the melting point of the ethylene-glycidyl (meth)acrylate copolymer is 50° to 150°C.

5. The high water-absorbent resin particle according to any one of

claims 1 to 4, wherein the melt flow rate of the ethylene-glycidyl (meth)acrylate copolymer is 1 to 400 g/10 minutes at 190°C under 2160 gf.

6. The high water-absorbent resin particle according to any one of claims 1 to 5, wherein the high water-absorbent resin is at least one member selected from the group consisting of a crosslinked acrylate polymer, a crosslinked vinyl alcohol-acrylate copolymer, a crosslinked maleic anhydride-grafted polyvinyl alcohol, crosslinked acrylate-methacrylate copolymer, a crosslinked saponified methyl acrylate-vinyl acetate copolymer, a crosslinked starch-acrylate graft copolymer, a crosslinked saponified starch-acrylonitrile graft copolymer, a crosslinked carboxymethyl cellulose, a crosslinked isobutylene-maleic anhydride copolymer, and a crosslinked ethylene oxide polymer.

7. The high water-absorbent resin particle according to any one of claims 1 to 6, wherein the resin particle has an average particle diameter of 5 to 1000 μm .

ABSTRACT

A high water-absorbent resin particle, prepared by adhering an ethylene-glycidyl (meth)acrylate copolymer to the surface of a resin particle made of a high water-absorbent resin in the ratio of 0.5 to 50 parts by weight of the ethylene-glycidyl (meth)acrylate copolymer based on 100 parts by weight of the resin particle. The high water-absorbent resin particle can be favorably used as hygienic materials such as paper diapers and sanitary napkins, agricultural and horticultural materials, and the like.

BIRCH, STEWART, KOLASCH & BIRCH, LLP

P.O. Box 747 • Falls Church, Virginia 22040-0747
Telephone: (703) 205-8000 • Facsimile: (703) 205-8050

ATTORNEY DOCKET NO.
1422-0483P

PLEASE NOTE:
YOU MUST
COMPLETE THE
FOLLOWING:

COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT AND DESIGN APPLICATIONS

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated next to my name; that I verily believe that I am the original, first and sole inventor (if only one inventor is named below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

HIGHLY WATER-ABSORBING RESIN PARTICLE

Insert Title: →

Fill in Appropriate
Information —
For Use →
Without
Specification
Attached:

the specification of which is attached hereto. If not attached hereto,

the specification was filed on _____ as
United States Application Number _____;
and amended on _____ (if applicable); and/or
the specification was filed on January 21, 2000 as PCT
International Application Number PCT/JP00/00271; and was
amended under PCT Article 19 on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (six months for designs) prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as follows.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 (a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Insert Priority
Information: →
(if appropriate)

			Priority Claimed	
<u>11-16000</u>	<u>Japan</u>	<u>January 25, 1999</u>	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Month / Day / Year Filed)		
_____	_____	_____	<input type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Month / Day / Year Filed)		
_____	_____	_____	<input type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Month / Day / Year Filed)		
_____	_____	_____	<input type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Month / Day / Year Filed)		

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below.

Insert Provisional
Application(s): →
(if any)

(Application Number)	(Filing Date)
_____	_____
(Application Number)	(Filing Date)

All Foreign Applications, if any, for any Patent or Inventor's Certificate Filed More than 12 Months (6 Months for Designs) Prior to the Filing Date of This Application:

Insert Requested
Information: →
(if appropriate)

Country	Application Number	Date of Filing (Month / Day / Year)
_____	_____	_____
_____	_____	_____

I hereby claim the benefit under Title 35, United States Code, §120 of any United States and/or PCT application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States and/or PCT application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Insert Prior U.S.
Application(s): →
(if any)

(Application Number)	(Filing Date)	(Status — patented, pending, abandoned)
_____	_____	_____
(Application Number)	(Filing Date)	(Status — patented, pending, abandoned)

I hereby appoint the following attorneys to prosecute this application and/or an international application based on this application and to transact all business in the Patent and Trademark Office connected therewith and in connection with the resulting patent based on instructions received from the entity who first sent the application papers to the attorneys identified below, unless the inventor(s) or assignee provides said attorneys with a written notice to the contrary:

Raymond C. Stewart (Reg. No. 21,066)	Terrell C. Birch (Reg. No. 19,382)
Joseph A. Kolasch (Reg. No. 22,463)	James M. Slattery (Reg. No. 28,380)
Bernard L. Sweeney (Reg. No. 24,448)	Michael K. Mutter (Reg. No. 29,680)
Charles Gorenstein (Reg. No. 29,271)	Gerald M. Murphy, Jr. (Reg. No. 28,977)
Leonard R. Svensson (Reg. No. 30,330)	Terry L. Clark (Reg. No. 32,644)
Andrew D. Meikle (Reg. No. 32,868)	Marc S. Weiner (Reg. No. 32,181)
Joe McKinney Muncy (Reg. No. 32,334)	C. Joseph Faraci (Reg. No. 32,350)
Donald J. Daley (Reg. No. 34,313)	John W. Bailey (Reg. No. 32,881)
John A. Castellano (Reg. No. 35,094)	

Send Correspondence to: **BIRCH, STEWART, KOLASCH & BIRCH, LLP**
P.O. Box 747 • Falls Church, Virginia 22040-0747
Telephone: (703) 205-8000 • Facsimile: (703) 205-8050

**PLEASE NOTE:
YOU MUST
COMPLETE
THE
FOLLOWING:**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First or Sole Inventor: Insert Name of Inventor Insert Date This Document is Signed Insert Residence Insert Citizenship	GIVEN NAME Manabu	FAMILY NAME NAGATA	INVENTOR'S SIGNATURE <i>Manabu Nagata</i>	DATE* June 28, 2001
	Residence (City, State & Country) Himeji-shi, Hyogo 672-8076 Japan JPX			CITIZENSHIP Japan
	POST OFFICE ADDRESS (Complete Street Address including City, State & Country) c/o Sumitomo Seika Chemicals Co., Ltd. Functional Polymers Research Laboratory, 1, Irifune-cho, Shikama-ku, Himeji-shi, Hyogo 672-8076 Japan			
Full Name of Second Inventor, if any: see above	GIVEN NAME Shinichi	FAMILY NAME TAKEMORI	INVENTOR'S SIGNATURE <i>Shinichi Takemori</i>	DATE* June 28, 2001
	Residence (City, State & Country) Himeji-shi, Hyogo 672-8076 Japan JPX			CITIZENSHIP Japan
	POST OFFICE ADDRESS (Complete Street Address including City, State & Country) c/o Sumitomo Seika Chemicals Co., Ltd. Functional Polymers Research Laboratory, 1, Irifune-cho, Shikama-ku, Himeji-shi, Hyogo 672-8076 Japan			
Full Name of Third Inventor, if any: see above	GIVEN NAME Hiroyuki	FAMILY NAME UEYAMA	INVENTOR'S SIGNATURE <i>Hiroyuki Ueyama</i>	DATE* July 5, 2001
	Residence (City, State & Country) Himeji-shi, Hyogo 672-8076 Japan JPX			CITIZENSHIP Japan
	POST OFFICE ADDRESS (Complete Street Address including City, State & Country) c/o Sumitomo Seika Chemicals Co., Ltd. Functional Polymers Research Laboratory, 1, Irifune-cho, Shikama-ku, Himeji-shi, Hyogo 672-8076 Japan			
Full Name of Fourth Inventor, if any: see above	GIVEN NAME Kazuaki	FAMILY NAME OHNISHI	INVENTOR'S SIGNATURE <i>Kazuaki Ohnishi</i>	DATE* July 12, 2001
	Residence (City, State & Country) Mitoyo-gun, Kagawa 769-1602 Japan JPX			CITIZENSHIP
	POST OFFICE ADDRESS (Complete Street Address including City, State & Country) c/o Technical Center, Uni-Charm Corporation, 1531-7, Takasuka, Wadahama, Toyohama-cho, Mitoyo-gun, Kagawa 769-1602 Japan			
Full Name of Fifth Inventor, if any: see above	GIVEN NAME Youko	FAMILY NAME YABE	INVENTOR'S SIGNATURE <i>Youko Yabe</i>	DATE* July 13, 2001
	Residence (City, State & Country) Mitoyo-gun, Kagawa 769-1602 Japan JPX			CITIZENSHIP Japan
	POST OFFICE ADDRESS (Complete Street Address including City, State & Country) c/o Technical Center, Uni-Charm Corporation, 1531-7, Takasuka, Wadahama, Toyohama-cho, Mitoyo-gun, Kagawa 769-1602 Japan			

I hereby appoint the following attorneys to prosecute this application and/or an international application based on this application and to transact all business in the Patent and Trademark Office connected therewith and in connection with the resulting patent based on instructions received from the entity who first sent the application papers to the attorneys identified below, unless the inventor(s) or assignee provides said attorneys with a written notice to the contrary:

Raymond C. Stewart	(Reg. No. 21,066)	Terrell C. Birch	(Reg. No. 19,382)
Joseph A. Kolasch	(Reg. No. 22,463)	James M. Slattery	(Reg. No. 28,380)
Bernard L. Sweeney	(Reg. No. 24,448)	Michael K. Mutter	(Reg. No. 29,680)
Charles Gorenstein	(Reg. No. 29,271)	Gerald M. Murphy, Jr.	(Reg. No. 28,977)
Leonard R. Svensson	(Reg. No. 30,330)	Terry L. Clark	(Reg. No. 32,644)
Andrew D. Meikle	(Reg. No. 32,868)	Marc S. Weiner	(Reg. No. 32,181)
Joe McKinney Muncy	(Reg. No. 32,334)	C. Joseph Faraci	(Reg. No. 32,350)
Donald J. Daley	(Reg. No. 34,313)	John W. Bailey	(Reg. No. 32,881)
John A. Castellano	(Reg. No. 35,094)		

Send Correspondence to: **BIRCH, STEWART, KOLASCH & BIRCH, LLP**
P.O. Box 747 • Falls Church, Virginia 22040-0747
Telephone: (703) 205-8000 • Facsimile: (703) 205-8050

**PLEASE NOTE:
YOU MUST
COMPLETE
THE
FOLLOWING:**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First or
Sole Inventor:
Insert Name of
Inventor
Insert Date This
Document is Signed
Insert Residence
Insert Citizenship
Insert Post Office
Address
Full Name of Second
Inventor, if any
see above

GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Norihiko	ISHIKAWA	Norihiko Ishikawa	July 12, 2001
Residence (City, State & Country)		CITIZENSHIP	
Mitoyo-gun, Kagawa 769-1602 Japan		JPN	Japan
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
c/o Technical Center, Uni-Charm Corporation, 1531-7, Takasuka, Wadahama, Toyohama-cho, Mitoyo-gun, Kagawa 769-1602 Japan			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			

Full Name of Third
Inventor, if any
see above

Full Name of Fourth
Inventor, if any
see above

Full Name of Fifth
Inventor, if any
see above